

Available Mounts: Non-Penetrating Roof Mount


Purpose:

This is the standard mount used by Comlabs for satellite installations; it is also the unit that is priced in all satellite equipment packages. The mount is considered to be non-penetrating as it does not require that holes be made in the roof membrane, instead it uses weight as a ballast. Additionally, Communications Laboratories supplies a rubber mat to cushion each site's roof membrane from the metal frame and weight of the mount. This mount can only be used in locations that have a portion of the roof that is flat.

Catalogue Description

The catalogue description for this mount is an associated PDF file that can be accessed in the Downloads area of the Installations section of the Comlabs website. It contains detailed descriptions, actual pictures of the mount, installation procedures, and ballast requirements.

Actual Picture of Mount Installed:

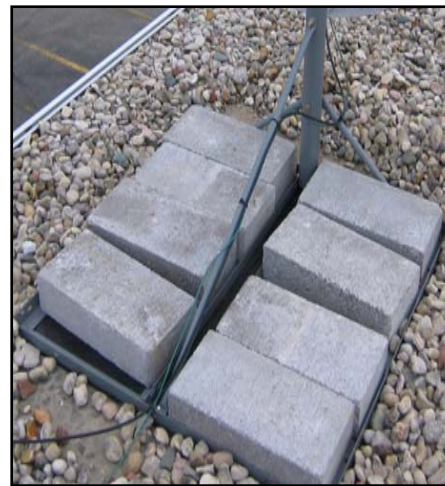

For more information on Available Mounts and Installations, please contact our Logistics Department at (321) 409-9898 option 2.